


IMO COLREG 72 Lights and Visibility - Powerboats

IMO COLREG requirements for navigation lighting on powerboats less than 50m LOA (Length Overall).


Note - Sailboats under motor adopt the rules for Powerboats.

Powerboats up to 7m. Max 7 knots




1 All Round White lamp

Powerboats up to 12m where Masthead and Stern lamps cannot be mounted




1 All Round White lamp
1 Port lamp
1 Starboard lamp

Powerboats up to 12m where Masthead and Stern lamps cannot be mounted

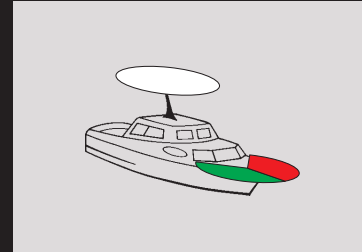


1 All Round White lamp
1 Bi-colour lamp

Powerboats up to 20m

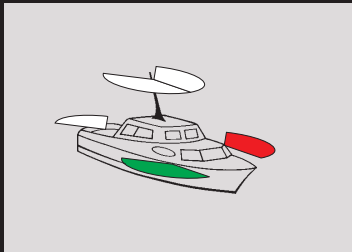


1 Masthead lamp
1 Port lamp
1 Starboard lamp
1 Stern lamp

Powerboats up to 20m

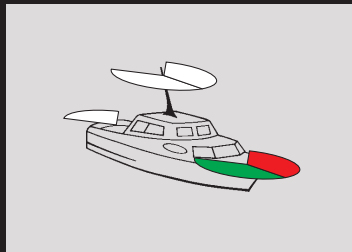


1 Masthead lamp
1 Bi-colour lamp
1 Stern lamp

Powerboats up to 50m

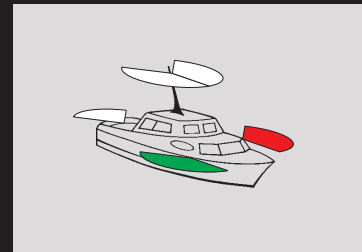


1 Masthead lamp
1 Port lamp
1 Starboard lamp
1 Stern lamp

A vessel less than 50m engaged in trawling

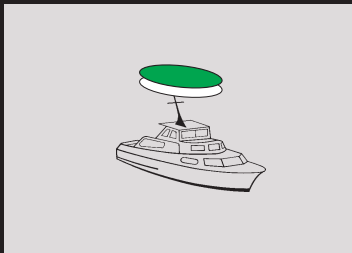


1 All Round Green lamp
1 All Round White lamp
mounted above one another

A vessel less than 50m engaged in fishing, other than trawling

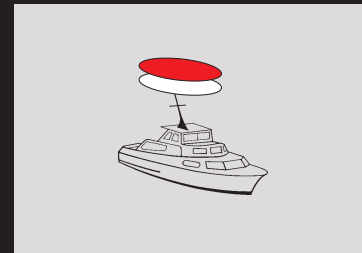


1 All Round Red lamp
1 All Round White lamp
mounted above one another

Powerboats towing with a tow length of less than 200m

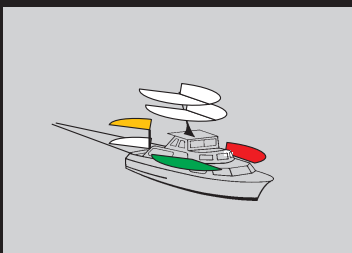


In addition to Port, Starboard and Stern lamps
1 Towing lamp mounted above the stern lamp
2 Masthead lamps in a vertical line
(When the tow length exceeds 200m, three Masthead lamps in a vertical line)

A vessel engaged in diving operations

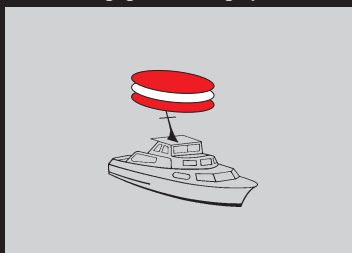

1 All Round Red lamp
1 All Round White lamp
1 All Round Red lamp
mounted above one another

A vessel engaged in pilotage duty

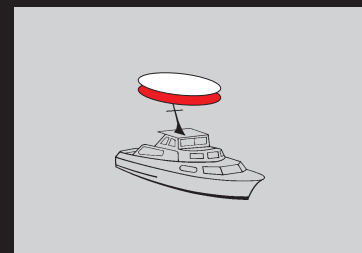

In addition to Port, Starboard, Masthead and Stern lamps
1 All Round White lamp
1 All Round Red lamp
mounted above one another