



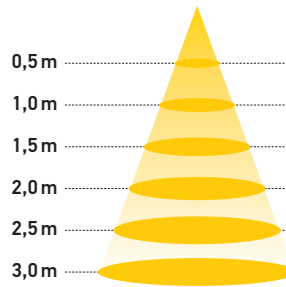

## Product card: 102i Recessed

<b>700 lm</b> LIGHT OUTPUT	<b>11W</b> POWER CONSUMPTION	<b>108mm</b> CUTOUT	<b>IP 23</b> PROTECTION CLASS	<b>90</b> CRI
-------------------------------	---------------------------------	------------------------	----------------------------------	------------------

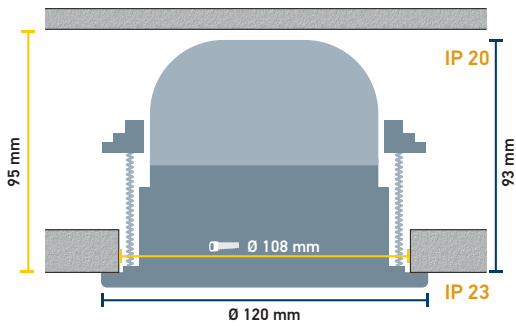

	Luminous Intensity Distance /Lux 3000 K		
	60°	40°	15°
0,5m	0,6m / 2600	0,3m / 5200	
1,0m	1,1m / 650	0,7m / 1300	
1,5m	1,7m / 290	1,0m / 580	
2,0m	2,3m / 160	1,4m / 325	
2,5m	2,8m / 105	1,7m / 210	
3,0m	3,4m / 72	2,1m / 145	

### OPTIONS

Beam angle	Color temp	Fixing	Lens	Color of framework	Color of trim	Connection Type	Connectors	Poles	Control
15	2700K	Elevator	Clear	White	White	Single	Wago	2-pole	ON/OFF
40	3000K		Diffused	Black	Black	Extension	Ensto	3-pole	Phase cut
60	4000K			Painted	Chrome				
90					Gold				
					Painted				