

# Product card: S104 IP55




**1150 lm**  
LIGHT OUTPUT

**15W**  
POWER CONSUMPTION

**102mm**  
CUTOUT

**IP55**  
PROTECTION CLASS

**90**  
CRI

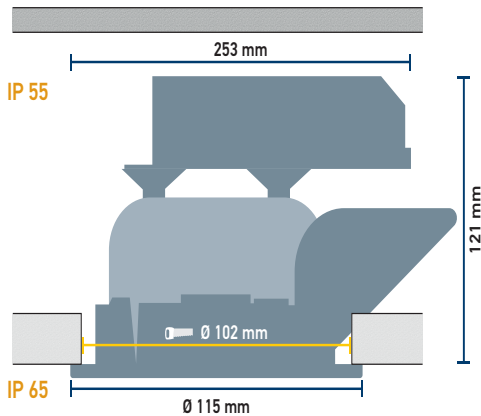

	Luminous Intensity Distance /Lux 3000 K		
	60°	40°	15°
0,5m	0,6m / 4300	0,3m / 8600	
1,0m	1,1m / 1100	0,7m / 2150	
1,5m	1,7m / 480	1,0m / 950	
2,0m	2,3m / 270	1,4m / 270	
2,5m	2,8m / 175	1,7m / 170	
3,0m	3,4m / 120	2,1m / 120	

## OPTIONS

Beam angle	Color temp	Fixing	Lens	Color of trim	Connection Type	Connectors	Poles	Control
15	2700K	Spring clip	Clear	White	Single	Wieland	3-pole	ON/OFF
40	3000K		Diffused	Black	Extension		5-pole	Phase cut
60	4000K			AISI316				1-10
90								DALI
								DMX