


Product card: S80 Fixed IP55



500 lm LIGHT OUTPUT	6W POWER CONSUMPTION	82 mm CUTOUT	IP55 PROTECTION CLASS	90 CRI
-------------------------------	--------------------------------	------------------------	---------------------------------	------------------

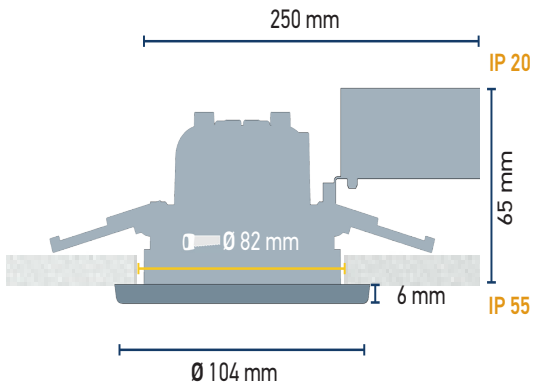

	Luminous Intensity Distance / Lux 3000 K		
	60°	40°	20°
0,5m	0,6m / 1918	0,3m / 3889	0,2m / 13875
1,0m	1,1m / 479	0,7m / 972	0,4m / 3469
1,5m	1,7m / 213	1,0m / 432	0,6m / 1542
2,0m	2,3m / 120	1,4m / 243	0,8m / 867
2,5m	2,8m / 77	1,7m / 156	1,0m / 555
3,0m	3,4m / 53	2,1m / 108	1,2m / 385

OPTIONS

Beam angle	Color temp	Fixing	Lens	Color of framework	Color of trim	Connection Type	Connectors	Poles	Control
20	2700K	Screws	Clear	White	White	Single	Wago	2-pole	ON/OFF
40	3000K	Springs	Diffused	Black	Black	Extension	Ensto	3-pole	Phase cut
60	4000K	Elevator		Painted	Chrome		Wieland	5-pole	1-10
90					Gold				DALI
					AISI316				DMX
					Painted				24V/PVM