



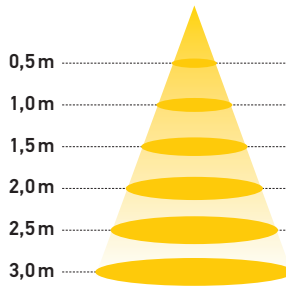

## Product card: S82 Fixed IP55

<b>800 lm</b> LIGHT OUTPUT	<b>11W</b> POWER CONSUMPTION	<b>82 mm</b> CUTOUT	<b>IP55</b> PROTECTION CLASS	<b>90</b> CRI
-------------------------------	---------------------------------	------------------------	---------------------------------	------------------

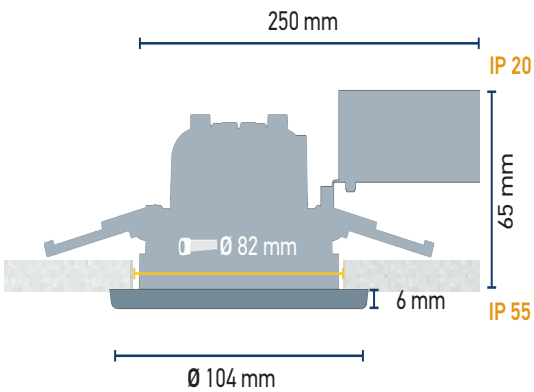

	Luminous Intensity Distance / Lux 3000 K		
	60°	40°	20°
0,5m	0,6m / 1739	0,3m / 4122	0,2m / 20999
1,0m	1,1m / 435	0,7m / 1031	0,4m / 5250
1,5m	1,7m / 193	1,0m / 458	0,6m / 2333
2,0m	2,3m / 109	1,4m / 258	0,8m / 1312
2,5m	2,8m / 70	1,7m / 154	1,0m / 720
3,0m	3,4m / 48	2,1m / 115	1,2m / 583

### OPTIONS

Beam angle	Color temp	Fixing	Lens	Color of framework	Color of trim	Connection Type	Connectors	Poles	Control
20	2700K	Screws	Clear	White	White	Single	Wago	2-pole	ON/OFF
40	3000K	Springs	Diffused	Black	Black	Extension	Ensto	3-pole	Phase cut
60	4000K	Elevator		Painted	Chrome		Wieland	5-pole	1-10
90					Gold				DALI
					AISI316				DMX
					Painted				24V/PVM